

全封闭干燥过滤器 Hermetic drier filter

干燥过滤器采用,干燥,过滤组合设计,并以气体为介质,具有过滤精度高,分子筛吸水能力强等特征能有效的防止过滤器,可溶物进入制冷系统的关键部位,从而保证系统在最佳状态下运行。

特点

- 干燥表面发挥了最有效的过滤作用
- 具有溶解水分和酸等污染物的能力
- 由工艺控制的玻璃纤维网状组织提高更优良的过滤
- 拉头型的有焊接(ODF) ,和螺口(SAE)

技术参数

- 制冷剂CFC.HCFC.HFC
- 最大工作压力：3.5 Mpa

Drier filteruses the combination design of drier and filter, regards gas as medium. The product is high accuracy of fiter andexcellent ability of water absorption, because of the feature of the product,foreign matters can not enter the coolingsystem, so that the cooling system can run smoothly.


Feature

- Effective use of surface area of desiccant to filter
- Desiccant has ability to filter water and acid
- Controlled by technology of fiberglass network structure to provide better filter ability
- ODF,SAE connection is optional

Technical data

- Refrigerant: CFC, HCFC, HFC
- Maximum working pressure: 3.5Mpa

型号 Model	接口尺寸Connection size(inch)		流体制冷量Cooling capacity				A(mm)	B(mm)	C(mm)		
	焊接口ODF	螺口 SAE	R134a	R22	R404a	R502					
JH-052		1/4"	9.0	9.8	6.5	6.3	128	82	Φ 63		
JH-052S	1/4"		13.3	14.4	9.6	9.4	118				
JH-053		3/8"	21.4	23.3	15.4	15.1	138				
JH-053S	3/8"		26.5	28.9	19.1	18.7	118				
JH-083		3/8"	21.8	23.7	15.7	15.4	156	100		Φ 63	
JH-083S	3/8"		27.4	29.8	19.8	19.3	136				
JH-084		1/2"	36.4	39.6	26.2	25.7	160				
JH-084S	1/2"		28.9	42.4	28.1	27.5	136				
JH-163		3/8"	22.2	24.2	16.1	15.7	178	122			Φ 63
JH-163S	3/8"		31.7	34.3	22.9	22.4	158				
JH-164		1/2"	38.5	41.9	27.8	27.2	182				
JH-164S	1/2"		49.6	54	35.8	35.1	158				
JH-165		5/8"	50.5	54.9	36.4	35.7	190	179	Φ 76		
JH-165S	5/8"		67.2	73.1	48.5	47.5	168				
JH-304		1/2"	43.6	47.5	31.5	30.8	240				
JH-304S	1/2"		54.1	59.1	39.2	38.4	215				
JH-305		5/8"	55.6	60.5	40.1	39.3	247				
JH-305S	5/8"		74.0	80.5	53.4	52.3	225				
JH-306		3/4"	58.6	65.2	43.5	43	260				
JH-306S	3/4"		78.2	84.3	56.5	54.2	225				
JH-307		7/8"	64.1	86.7	62.4	60.1	275				
JH-307S	7/8"		83.4	90.8	60.2	59.0	230				
JH-309S	1-1/8"		109.1	118.7	78.7	77.1	240				

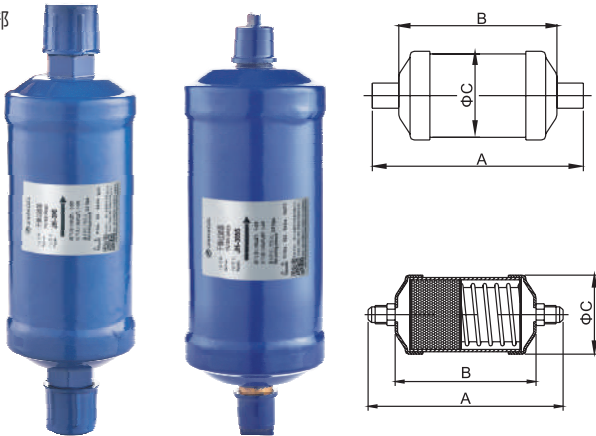

开启式干燥过滤器 Open-type drier filter



型号 Model	规格 Specifications	接口尺寸Connection size(inch)	A(mm)	B(mm)
JH-2F6.3	Dg8	3/8"	51	200
JH-2F6.3	Dg10	1/2"	51	200
JH-2F7.0	Dg13	5/8"	51	200
JH-2F10	Dg13	5/8"	70	305
JH-2F10	Dg16	3/4"	70	315
JH-2F10	Dg19	7/8"	70	320

全封闭吸气过滤器系列 Hermetic suction line filter series



型号 Model	接口尺寸Connection size(inch)	A(mm)	B(mm)
JH-285T	5/8"	89	204
JH-286T	3/4"	89	204
JH-287T	7/8"	89	204
JH-289T	1-1/8"	89	252
JH-2811T	1-3/8"	89	252
JH-2813T	1-5/8"	89	252
JH-2817T	2-1/8"	89	300